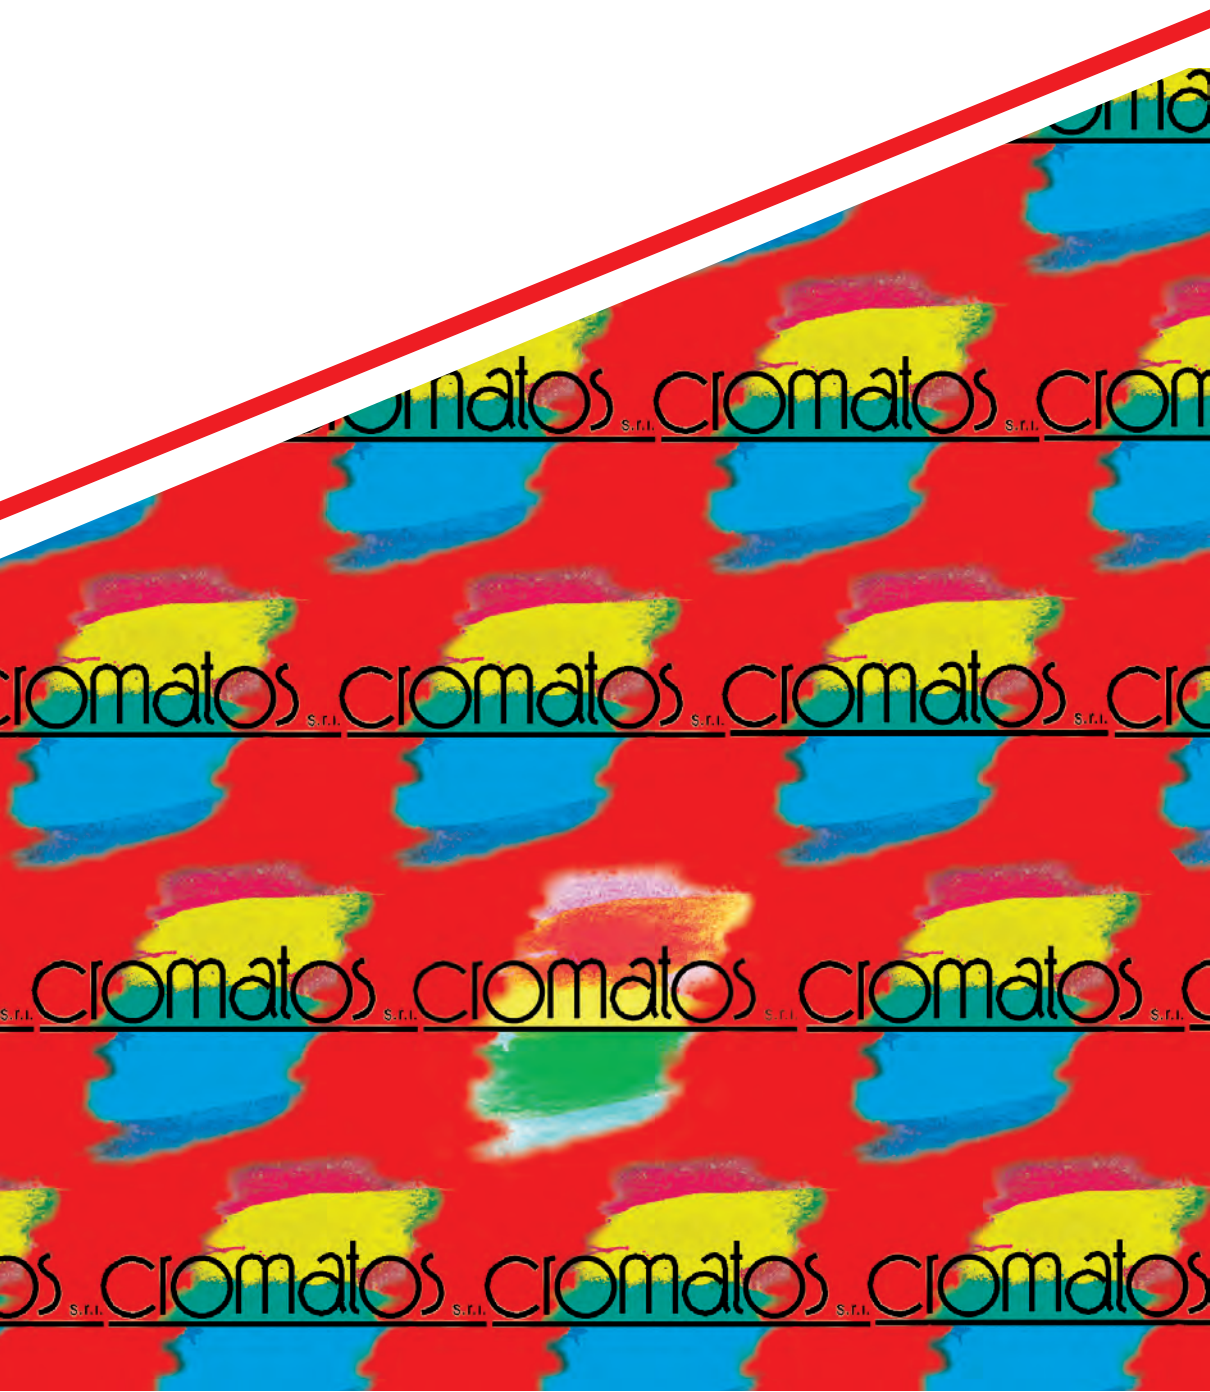

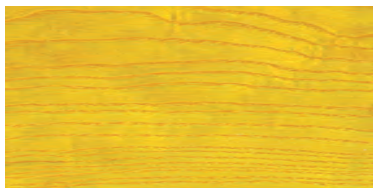


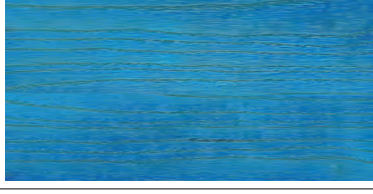

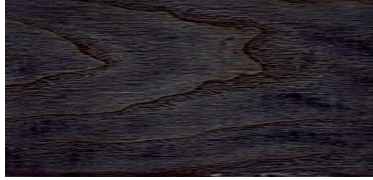


SERIE NITOR SL



SERIE NITOR SL

		Dry content (%)	Light fastness*	DILUTION			
				Acetone	Ethanol	Nitro diluents	Poliurethanic diluents
Nitor White SL - PK		37 +/-3	8	good	good	good	good
Nitor Yellow SL-R		22 +/-3	6-7	good	good	good	good
Nitor Orange SL-Y		22 +/-3	8	good	good	good	good
Nitor Red SL-2K		17 +/-3	5	good	good	good	good
Nitor Blue SL-2G		15 +/-3	8	good	good	good	good
Nitor Brown SL-AR5		19 +/- 3	6-7	good	good	good	good
Nitor Black SL-RR		23 +/-3	8	good	good	good	good

* 1-8 Blue wool scale

Serie Nitor SL

Nitor SL dyes are selected transparent pigment solvent based dispersions dedicated to wood and leather application. They are absolutely miscible among each other.

They are dilutable with acetone, ethanol, nitro and poliurethanic diluents, and they are suitable for tinting of wood (frames, decorations and furniture components, both with rollers and with manual airbrushes and automatic sprayer machines) and leather finishing.

Spray System

If You use **Nitor SL** in a spray tinting system, we suggest a dilution form 1:5 to 1:20 with acetone, ethanol, nitro or poliurethanic diluents (depending on depth of shade).

If deeper wetting of pores is needed, add 10-30% of glycols (DPM).

Roller System

For the usage of **Nitor SL** within a roller tinting system, no or low dilution is needed (in case 1:1, 1:2 dilution with PM). For better pores wetting add 10-20% of glycols (DPM).

Preparation of wood

Suggested sand paper is around 150-180.

Drying times

Spray system: 10-15 minutes at room temperature.

Roller system: 30 - 40° with IR radiations or hot air (40°- 50°C).

Other data

Expiry date: 9 months at room temperature.

All informations are based on the current state of our knowledge and on the results of our tests, but they are given without guarantee. The Buyer remains responsible for verifying that the products are suitable for his intended process or purpose. Tests before the industrial use of the product are recommended.



cromatos s.r.l.

COLORANTI, PIGMENTI E PRODOTTI CHIMICI PER L'INDUSTRIA
INDUSTRIAL DYESTUFFS, PIGMENTS AND CHEMICAL PRODUCTS

cromatos s.r.l. **cromatos** s.r.l. **cromatos** s.r.l. **cromatos** s.r.l.

cromatos s.r.l. **cromatos** s.r.l. **cromatos** s.r.l. **cromatos** s.r.l.

CROMATOS s.r.l. Via E. Barsanti, 28 47122 Forlì Italy - Tel. ++39 0543 796191 Fax ++39 0543 796189
<http://www.cromatos.com> • e-mail: info@cromatos.com

cromatos s.r.l. **cromatos** s.r.l. **cromatos** s.r.l. **cromatos** s.r.l.